

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)

09/634207

#4

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|--|
| (51) International Patent Classification: H04N 5/76 | A1 | (11) International Publication Number: WO 00/13410 (43) International Publication Date: 09 March 2000 (09.03.2000) |
| (21) International Application Number: PCT/US99/00975 (22) International Filing Date: 15 January 1999 (15.01.1999) (30) Priority Data: 09/143,232 28 August 1998 (28.08.1998) US (60) Parent Application or Grant RAYTHEON COMPANY [/]; (J) MONROE, David, A. [/]; (J) MONROE, David, A. [/]; (J) HOFFER, Randall [/]; (J) BAKER, Stephen, M. [/]; (J) FORMAN, Michael, A. [/]; (J) CURFISS, Robert, C. ; (J) | | Published |
| (54) Title: MULTIFUNCTION REMOTE CONTROL SYSTEM (54) Titre: SYSTEME DE COMMANDE A DISTANCE MULTIFONCTIONNEL (57) Abstract <p>A multifunction remote controlled video recording, transmission and playback system includes a still frame generator adapted for selecting and generating still frames on the fly while a full motion video signal is being recorded, without interrupting the recording function. Audio and data signals, such as cockpit audio (42) in an aircraft and gps (40) and telemetry signals (40) may also be incorporated in the recorded full motion video recording on a real time synchronized basis. The still frames are digitally enhanced, producing a full field frame from the analog video signal. Still frames can be produced in single, burst and snap modes without interrupting the full motion video recording function.</p> (57) Abrégé <p>Cette invention concerne un système d'enregistrement, d'émission et de lecture vidéo commandé à distance et multifonctionnel comprenant un générateur de trames fixes qui permet de sélectionner et de générer des trames fixes pendant le vol et pendant qu'un signal vidéo de mouvement complet est en cours d'enregistrement, ceci sans interrompre la fonction d'enregistrement. Les signaux audio et de données, tels que les signaux audio (42) de cockpit dans un avion et les signaux GPS (40) et de télémétrie (40), peuvent également être incorporés à l'enregistrement vidéo de mouvement complet enregistré, ceci sur une base synchronisée en temps réel. Les trames fixes sont soumises à un rehaussement numérique, ce qui permet de produire une trame plein champ à partir du signal vidéo analogique. Les trames fixes peuvent être produites selon des modes unique, en rafale ou instantané sans interrompre la fonction d'enregistrement vidéo de plein mouvement.</p> | | |

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|--|-----------|---|
| (51) International Patent Classification ⁶ : H04N 5/76 | A1 | (11) International Publication Number: WO 00/13410 |
| | | (43) International Publication Date: 9 March 2000 (09.03.00) |
| (21) International Application Number: PCT/US99/00975 (22) International Filing Date: 15 January 1999 (15.01.99) (30) Priority Data: 09/143,232 28 August 1998 (28.08.98) US | | (81) Designated States: AL, AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GE, HR, HU, ID, IL, IN, IS, JP, KP, KR, LC, LK, LR, LV, MG, MK, MN, MX, NO, NZ, PL, RO, SG, SI, SK, SL, TR, TT, UA, UZ, VN, YU, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). |
| (71) Applicant: RAYTHEON COMPANY [US/US]; 141 Spring Street, Lexington, MA 02173 (US). (71)(72) Applicant and Inventor: MONROE, David, A. [US/US]; P.O. Box 780907, San Antonio, TX 78278 (US). (72) Inventors: HOFFER, Randall; 403 Cedar Place, Boerne, TX 78006 (US). BAKER, Stephen, M.; 2466 Rim Oak, San Antonio, TX 78232 (US). FORMAN, Michael, A.; 3915 Forest Creek, San Antonio, TX 78230 (US). (74) Agents: CURFISS, Robert, C. et al.; Bracewell & Patterson, L.L.P., Suite 2900, South Tower Pennzoil Place, 711 Louisiana Street, Houston, TX 77002-2781 (US). | | Published With international search report. |

(54) Title: MULTIFUNCTION REMOTE CONTROL SYSTEM

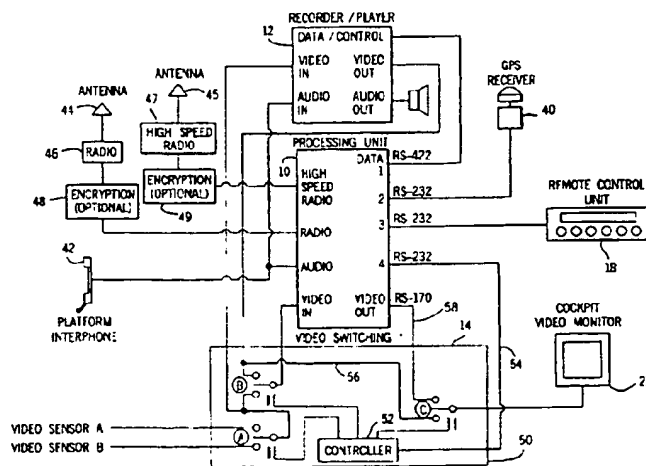

(57) Abstract

A multifunction remote controlled video recording, transmission and playback system includes a still frame generator adapted for selecting and generating still frames on the fly while a full motion video signal is being recorded, without interrupting the recording function. Audio and data signals, such as cockpit audio (42) in an aircraft and gps (40) and telemetry signals (40) may also be incorporated in the recorded full motion video recording on a real time synchronized basis. The still frames are digitally enhanced, producing a full field frame from the analog video signal. Still frames can be produced in single, burst and snap modes without interrupting the full motion video recording function.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | KR | Republic of Korea | PT | Portugal | | |
| CN | China | KZ | Kazakhstan | RO | Romania | | |
| CU | Cuba | LC | Saint Lucia | RU | Russian Federation | | |
| CZ | Czech Republic | LI | Liechtenstein | SD | Sudan | | |
| DE | Germany | LK | Sri Lanka | SE | Sweden | | |
| DK | Denmark | LR | Liberia | SG | Singapore | | |
| EE | Estonia | | | | | | |

Description

5

10

15

20

25

30

35

40

45

50

55

-1-

MULTIFUNCTION REMOTE CONTROL SYSTEM**BACKGROUND OF THE INVENTION****Field of the Invention**

The invention is generally related to audio and video recording and playback systems for aircraft and is specifically directed to a single, multifunction control unit for recording, transmission and playback of both audio and video signals.

Discussion of the Prior Art

Recording systems have been used on board aircraft for many years. In the military, many aircraft such as, by way of example, the U.S. Navy F-14 Tomcat, have included recorders that permit the pilot to selectively record video images by activating the recorder. These systems also permit the images to be played back for viewing in a cockpit monitor by the pilot while in flight or, selectively, permit transmission of the images to a ship or ground station. The images are typically input from a video sensing device located in the aircraft and also controlled by the pilot

Over the last several years a need has developed for better image recording, capture, playback and transmission techniques on board these aircraft. The current systems, such as, by way of example, the TEAC V1000 Video Tape Recorders (VTRs), only permit twenty minute or less recording capability and must be scrolled in order to find specific images in the recording. Further, if a specific image is to be displayed as a still frame on the cockpit monitor, the recorder is stopped and live images cannot be recorded by the video during this interruption

It is also desirable that the recording system be expanded to include cockpit audio, telemetry signals, GPS (Global Positioning System) signals and other data signals available for monitoring the performance of the aircraft and for increasing the amount of information associated with the video signals.

5

-2-

SUMMARY OF THE INVENTION

10

The multifunction remote control system of the subject invention is specifically directed to an enhanced video recording, transmission and playback system for aircraft. The system is capable of not only recording, transmitting and playing back video images but is also adapted for recording, transmitting and playing back audio, telemetry, GPS and other data signal in synchronization with the video signal. One important unique feature of the invention is the incorporation of a single, multifunction remote control unit for controlling all the recording, capture, transmission and playback functions at the fingertips of the pilot.

15

20

The system of the subject invention utilizes a digital image capture system capable of operating as a recorder and playback unit as well as a transmission system for transmitting full motion, selected still frame and combined full motion and still frame video images to an on board monitor or to a ship or shore station. One of the important features of the invention is the capability to capture and transmit a still image on the fly while the recorder is still functioning. This is made possible by incorporating a digital image capture device that receives and captures the images being entered on the recording medium without interfering with the recording function. This also allows for better quality still images by permitting the capture and transmission of a full frame video image instead of the partial frame, single field still images of the prior art.

25

30

35

In operation, the recorder may be paused in typical fashion in order to view a single frame. As with prior art systems, this will pause the recording function and the single still frame be a typical analog frame with a partial field image, often including the typical tearing which is a standard paused playback artifact. However, if the specific image is desired to be captured and transmitted, the operator (or pilot) will select the capture mode and the system will back up a preselected number of frames and then forward through the selected still in order to digitally capture the selected image as a full frame image. This eliminates the fuzzy quality of single field images and eliminates the tearing, as well, resulting in a more reliable, sharper image for monitoring on site or for transmission to a remote location.

40

45

The system also permits on the fly capture of still frames without interrupting the recording cycle. In both the record and pause modes and the record and capture mode, the resulting captured signal is a sharp, full field (or full resolution) signal with a minimum of noise.

50

Another important feature of the invention is the capability for "marking" the recorded

55

5

-3-

10

15

20

25

30

35

40

45

50

55

medium for later selecting, and capturing selected stills. During the recording mode, this marking function permits selection for later seek and capture either during later playback after completion of a mission, or during the mission directly in the cockpit, using the cockpit monitor. When the media is in the playback mode, the "marked" stills may be either automatically captured and stored and/or transmitted as full frame digital stills, or the system may be used to manually scroll through the recording one-by-one or automatically scroll through all of the selected, marked stills for sequential viewing/and or transmission. This capability is particularly useful for verification of visual data, such as, by way of example, the visual verification of a target by a ship or shore station.

10 Another important feature of the invention is the automatic "reset" feature, where the beginning of each mission is marked on the recording medium and the counter point is noted or reset to zero. This permits ready identification of the beginning and end of each mission and permits the operator or pilot to automatically return to the beginning of each mission to review the recorded images and data without searching for the start point.

15 The digital capture capability of the subject invention permits continuous real time recording of video and other data while simultaneously permitting the pilot or other operator to select a "freeze" frame, permitting close analysis of a specific view without interrupting the recording process. The recorder/playback systems of the prior art require interruption of the recording process during a freeze-frame or pause mode. One important aspect of this feature is the ability to not only view the select "freeze" frame, but also to capture, store and/or transmit the frame to a remote station.

20 The versatility of the system of the subject invention permits transmission of the full motion image both in real time, or as a played back recording, as well as still frames of selected images and burst modes. The burst mode is a selection of sequential still images over a selected time frame. For example, assuming a target is identified and destroyed, it may be desirable to select a sequential series of still images at specific timed intervals, e.g. every one-fourth of a second, for five seconds before and twenty seconds after destruction, while at the same time simultaneously recording the full image on tape without interruption. The burst mode is more fully described in my co-pending application entitled: Video and Data Capture and Retrieval Surveillance System for Aircraft, Serial No. 08/729,139, filed on October 11, 1996; Acoustic

5

-4-

10

Catastrophic Detection and Data Capture and Retrieval System for Aircraft; Serial No. 08/738,487, filed on October 28, 1996 and Wireless Transducer Data Capture and Retrieval System for Aircraft, Serial No. 08/745,536, filed on November 12, 1996 and incorporated by reference herein.

15

20

5 One advantage of the system of the present invention is the capability for recording not only video signals but also cockpit audio and telemetry, GPS and other data signal as well, in a real time, synchronized relationship with the video image. The data signals are displayed in alphanumeric symbols with the video image in both the full motion and still frame mode. The audio portion is recorded for playback and transmission in the full motion mode. The data signals
10 can be used as part of the marking function. For example, specific still frame images could be selected based on GPS data for capture and storage, as well as for transmission.

25

30

35

One of the most significant advantages of the subject invention is the inclusion of all the functional and operating controls in a single remote control unit easily accessed by the pilot in the cockpit. This permits easy access and control of the system during flight, permitting full use of the multifunction capability of the system. In the preferred embodiment, Phototelesis ATR-403WB and RCU-403 capture and transmission modules are combined with a TEAC HI 8 V80 VTR recorder/playback unit. This can be activated during both the recording mode and the playback mode. These components are combined and programmed with the novel features of the subject invention to provide the versatile, multifunction system. The single, multifunction remote control unit is then utilized to not only control the recorder record and pause and playback function but also to control the select, capture and transmit functions of the processor

40

It is, therefore, an object and feature of the subject invention to provide for a versatile, accessible, multifunction recording and playback system for recording video images on board an aircraft during flight.

45

25 It is also an object and feature of the subject invention to provide for a single, multifunction control unit for controlling all recording, selection and capturing, transmission and playback functions of the system.

50

It is another object and feature of the subject invention to provide for a combination video, audio and data recorder having a single remote control unit for controlling all of the functions from a single control unit.

55

5

-5-

10

It is yet another object and feature of the subject invention to provide for a multi-media recording, transmission and playback system which is capable of selecting, displaying, storing and transmitting still full field still frame images without interruption of the real time recording of full motion images.

15

5 It is also an object and feature of the subject invention to permit marking of selected stills, bursts or sections of full motion image segments via operator controlled selection, or selection based on predefined criteria such as time sequencing, GPS data or other.

20

10

Other objects and features of the invention will be readily apparent from the accompanying drawing and detailed description of the preferred embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

25

Fig. 1 is an overview of some of the platform configurations for which the system of the subject invention is suited.

30

Fig. 2 is a system interface diagram.

15

Fig. 3 is a more detailed diagram of a system having the components as shown in Fig. 2.

Fig. 4 is an alternative embodiment incorporating an MIL-ST-1553 data bus.

Fig. 5 is an alternative embodiment incorporating a platform computer associated with the system of the subject invention.

35

Fig. 6 is a block diagram of central processing unit of the system.

Fig. 7 is a block diagram of the remote control unit of the system.

40

20

Fig. 8 is an enlarged view of the remote control unit shown in Fig. 2

Fig. 9 is a menu flow chart for the system.

Figs. 10a, 10b and 10c are an expanded menu readout display, showing the alphanumeric display for each of the menu selections of Fig. 9.

45

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

50

25

A system overview is shown in Fig. 1. The system is adapted for use in any type of platform permitting not only the recording, capture, transmission and playback of video information, but also the mating of data signals and audio signal with the video information. The platform used as an example throughout this disclosure is a fixed wing military aircraft 1, such as, by way of example, the Navy F-14 Tomcat. The multi-function system of the subject invention permits data to be used on board the aircraft, as well as transmission and receipt of data between

55

5

-6-

10

15

20

25

30

35

40

45

50

55

a remote station such as a ship or ground based station 2. Images and data can be downlinked directly to the base station and configuration and control data and signals uplinked to the aircraft via radio transmission. The system of the present invention also accommodates air-to-air transmissions, as between the fixed wing aircraft 1 and the rotary winged aircraft 3, or air-to-sea transmissions, as between the fixed wing aircraft 1 and the marine vessel 4, or to ground as with the fixed winged aircraft 1 and the military vehicle 5 or the civilian vehicle 6. Any of a variety of combinations is possible. While the following description is directed primarily to communication between fixed wing aircraft and a ship or ground based system, it should be understood that the invention encompasses any combination of base and object stations or units.

As shown in Fig. 2, the system of the subject invention comprises a central processor unit 10, a recorder/playback unit 12, a base or interface unit 14 and a multifunction, single remote control unit 16. In the preferred embodiment, the central processing unit 10 is a Phototelesis A72-403WB and the remote control unit 16 is a Phototelesis RCU-403WB. The recorder/playback unit 12 is a TEAC HI 8 V80 VTR system. The access door 18 provides access to the HI 8 V80 tape cassette which is capable of up to two full hours of real time recording.

The remote control unit 16 is connected to the central processor 10 at connector J10 via cable 20. Wireless remotes may also be incorporated in the system without departing from the scope and spirit of the invention. A 28VDC power signal is provided via a cable connection at the J2 connector in the interface unit 14. The monitor system 21 comprises the 22 Lanterin Control Panel (optional), the PTID display 24 and the VDI display 26. These are connected to the system via cable system 28 at connector J4 in the interface unit. An ICS/DATA signal is connected via connector J3. The TCS video module 29, the video source, is connected via connector J5. The 28VDC power signal is transmitted from the interface unit 14 to the central processor 10 via a cable system 30 between connectors J7 and J13. Communication and control signals are transmitted between the central processor and the interface unit via cables connected to connector J3 in the interface unit and connector J11 and J12 in the processor unit. The main power switch is SW1 in the interface unit. The recorder/playback unit 12 is connected to the central processor via a cable system 30 between connectors J1 and J2 on the recorder playback unit, J15 on the Interface unit and connector J9 on the processing unit 10. A signal light LED 1 is provided on the central processor to indicate that the processor is powered and operational.

5

-7-

10

Once the system is powered up, all of the functions are controlled by the single remote control unit 16 which includes a plurality of function buttons 32 and an alphanumeric display panel 34.

15

As shown in more detail in Fig. 3, the system of the subject invention is adapted for interfacing with a telemetry and GPS data, as indicated by the GPS receiver 40 and the aircraft interphone 42. In a standard application, the central processing unit can transmit and receive radio signals from a ship, ground or other aircraft radio via antenna 44, radio link 46 and, where desired, an encryption unit 48.

20

25

30

The video switching module 50 is housed in the interface unit 14. Switch A in the video switching module 50 permits selection between any of a plurality of video sensors such as video sensors A and B, as shown. These may be manually selected via the remote control unit 16, or programmed selection may be utilized as programmed at the central processing unit 10. A controller module 52 receives the control and selection signal input on the data line 54 which is an RS-232 data line connected to data port 4 of the central processing unit. The processor video input select switch B is also provided in the video switching module and is controlled by the controller 52 and selects the sensor sources or the recorder/player output for capture/processing/storage/transmission. A display monitor input select switch C is also provided for selecting either the recorder/player unit output on line 56 or the processing unit output on line 58.

35

40

As shown in Fig. 3, the data signals from the GPS receiver and other data signal are introduced into the processor 10 for conditioning and input for recording at the data/control port of the recorder/player 12 and permit for digital storage, and transmission. This permits the data signals to be recorded in simultaneous, real-time mode with the video signals input from the video sensors A and B. The audio signal from the interphone 42 is also input to the processor 10 and the recorder/player unit 12 for real time, synchronized recording.

45

50

An optional high speed radio link 47, may also be provided to support full motion transmission capability and is linked to the high speed radio port of the processing unit 10 through the optional encryption unit 49. The antenna 45 permits downlinking to a base station via wireless radio. This high speed full motion capability could be incorporated in any of the various configurations of the invention. Compression of the video signal with a compressor algorithm

55

5

-8-

such as MPEG 1 is desirable.

10

An alternative embodiment is shown in Fig. 4 and incorporates an MIL-STD-1553 data bus for connecting the display 21, the GPS and/or other data signal modules 40 and the radio and data controller 48 to the system. The radio interphone system 60 is also expanded to include additional audio channels. A VDU input matrix module 62 is provided for controlling the various video input signals to the cockpit integrated display 21. This is controlled by the platform controller computer 70 which is also connected to the display 21 and the processor unit 10 by the MIL-STD-1553 data bus.

15

20

10

The 1553 bus is one common standard for interconnection of a plurality of data devices on military airborne or ground platforms. It is the equivalent of a local area network (or LAN). Other networking devices can be utilized without departing from the scope and spirit of the invention. Many different sensors and data signal generators may be connect to the 1553 bus, and data may be fused with imagery for recording, digital storage or transmission. Examples of sensors that may be utilized in connection with the subject invention and communicate and interact of the 1553 bus are: GPS receivers, magnetic compass system, laser range finders, a time source, the aircraft altimeter, and FLIR data, azimuth, range and location sensors. This greatly expands the versatility of the recording, capturing, transmission and playback capabilities of the system of the subject invention.

25

30

15

35

20

Data received by the 1553 bus may be processed and stored digitally with the processing unit 10, or may be encoded and stored on the recorder/player unit 12, or both. This allows for the capture and retrieval of a wide variety of real time mission data in connection with the mission video signals. The control of the processing unit 10 and the recorder/player unit 12 can be accomplished from the integrated VDU/key unit and the platform control computer over the 1553 bus. Digital data, such as video, audio, telemetry data, control commands, and the like may be communicated between the processing unit and the radio link (at 48) over the 1553 bus. In this manner, control commands can be transmitted from a remote station to the platform by using the common data link available to the platform.

40

45

25

50

30

Another embodiment of the subject invention is shown if Fig. 5. In this embodiment, the various components and data entry devices correspond to those shown in Figs. 3 and 4. However, a platform computer 70 has been incorporated to illustrate the adaptability of the device to vehicles

55

5 having a conventional PC (personal computer) or a platform specific computer capability. In this
configuration, the multifunction system of the subject invention may be controlled via the platform
10 computer. Video is displayed on the computer VDU 72 by digitizing the video and merging it
with the computer generated video in a display window. In addition, a window is provided for the
5 commands of the system, replacing the remote control unit 16. The communication connection
78 between the processing unit 10 and the platform computer 70 may be an RS-232 cable, a LAN
15 connection such as Ethernet MM-STD-1553, or any other data communications link. Other
platform data, such as data from other sensors and computers, can be linked into the system from
a LAN 76 or other direct communication connections. The computer keyboard 74 permits direct
20 command and data entry into the platform computer. A mouse input device or other similar input
means could also be used.

A block diagram of the basic components of the central processing unit 10 is shown in Fig.
25 6. A remote 28VPC power source is connected as shown in Fig. 2 and as indicated at 100. This
is introduced into a DC/DC convertor 102 for powering the cooling fan 104 and providing system
15 power at 106. When power is on, the pilot light LED 1 is illuminated. The heart of the processor
10 is a Pentium class CPU 108, which is connected to a PCMCIA memory card 110, RAM
memory 112 and ROM memory 114, as well as the BIOS system 116 via an address bus 118 and
30 a data bus 120. The CPU 108 controls the PCMCIA, RAM, ROM and BIOS components via the
control bus 122. The various components controlled by the CPU 108 via the control bus for
35 handling the flow of data and information on bus 124 are all interconnected via the bus 124, as
shown. The audio interface 126 permits communication with an analog radio interface and the
platform interphone system 42 (See Fig. 3). The synchronous communications interface 128
40 provides the communications link between the CPU 108 and the digital encryption/radio interface
48 (also Fig. 3). An option 1553 bus interface 130 for use with the configuration shown in Fig.
25 4 is also provided. The RS-232 interface 132 provides communications links to the various RS-
232 devices such as the GPS receiver 40, the remote control unit 16, the platform computer 70,
45 the video switching module 50, and the like. The RS-422 interface 134 is the link between the
CPU 108 and the recorder/player component 12. other interfaces may be used. An optional LAN
interface is also provided for supporting, by way of example, a LAN interfaced platform computer
50 70 as shown in Fig. 5. Video display logic is provided at 138 for supporting a CRT/VDU display

device 21. The video frame capture device 140 supports the capture function directly from the video sources such as sensors A and B, thereby permitting video capture without interrupting the recorder 12. A "feature connector" interface allows full motion data between the Video Frame Capture input and the Video Display Logic. The optional MPEG compressor 142 provides the high speed interface for supporting full motion transmission via the high speed radio link 47 (see Fig. 3).

A block diagram of the remote control unit 16 is shown in Fig. 7, the remote control unit. Is also powered by the platform power supply with a 28VDC power signal as shown at 150. The power signal is introduced to the DC/DC convertor 152 for providing system power at 14. The control signals from the system processor 10 are input and output on the RS-232 line 156 via the respective receiver 158 and driver 160. These signals are introduced into a microprocessor 162 via the serial input/output port 164. The microprocessor system includes a FLASH-RAM 166, a RAM 168 and a ROM 170, in communication with the microprocessor 162 via data bus 172, address bus 174 and control bus 176. A data bus 178 links the parallel display bars LED 180 and LED 182 with the microprocessor, and also links the various control buttons 32 with the microprocessor. In the preferred embodiment, the control buttons 32 are the input device for the system.

As better shown in Fig. 8 the control buttons 32 are dynamic function buttons located on the face of the remote control unit 16 in a row underneath the dual LED displays 180 and 182. The function of each button is dynamic, i.e., the function changes based on the stat of the system and the user interface. The specific function is shown in the LED row and is positioned directly above the button. This method permits maximum versatility with a minimum number of buttons (Six in the preferred embodiment).

The versatility of the system is demonstrated by the menu commands utilized in the preferred embodiment, all accomplished with the six dynamic control buttons on the remote control unit 16:

RECORDER/PLAYER COMMANDS & SUMMARIES:

Standby (STOP)

Record

Play

5

-11-

Rewind

Fast Forward

10

Forward Search

Reverse Search

5

Unthread

15

Reset Counter

Event Mark

RECORDER/PLAYER STATUS (MESSAGE) SUMMARY:

Standby

20

10

Recording

Play

Rewind

25

Fast Forward

Scan Forward

15

Scan Reverse

Unthread

30

Counter (Hours:Minutes:Seconds)

End of Tape (EOM)

Beginning of Tape (BOT)

35

20

Internal Error

Command Error

Communications Error

Event Mark

40

Dew (Condensation)

25

IMAGE STORE/TRANSMISSION COMMAND SUMMARY:

Send

45

Send and Delete

Set Send-to Call Sign

Set Local Call Sign

50

30

Capture

55

5

-12-

10

5

15

20

10

25

15

30

35

20

40

25

45

Capture & Send
Set SNAP/BURST Mode
Set Burst number
Set Burst Interval
Review Image Buffer
Scroll Forward
Scroll Reverse
Mark Image
Delete Image
Purge Buffer
Find Mark & Capture
Find Mark Capture and Send
Find All Marks & Capture
Find All Marks Capture & Send
Communications Abort
Select Input "N"
View Recorder
View Input
View Processor
Select Compression
Set Resolution
Input Type (S-video, composite, other)
IMAGE STORE/TRANSMISSION SUMMARY:
Sending to "XXXXX"
Receiving from "YYYYY"
Communications Error

50

30

55

A flow chart of the menu capability is shown in Fig. 9, initiating at Main Menu 200. Each of the selections 15 accessed by activating the various dynamic button switches 32 (See Figs. 2, 3 and 8). As indicated by the flow chart, the menu is scrolled through with the display shown in

5

-13-

10

the parallel display bars LED 180 and LED 182 (Fig. 8). A more detailed menu/display correlation is shown in Figs. 10a, 10b and 10c. Beginning at the Top Level Menu 202, reflecting the recorder state, the top display 180 shows various counter functions and the bottom display 182 illustrates the button function of the button switch 32 immediately below the display panel. As shown, the top level first position is the Record menu 204, the Play menu 206, the Standby menu 208 and the Unthread menu 210. This same display regimen is followed for each of the other Menu Levels which are activated as indicated in the drawing.

15

20

While certain features and embodiments of the invention have been described in detail herein it will be readily understood that the invention encompasses all of modifications, enhancements and improvements within the scope of the following claims.

25

30

35

40

45

50

55

Claims

5

10

15

20

25

30

35

40

45

50

55

5

-14-

CLAIMS

What is claimed is:

10

1. A multifunction remote controlled recording/playback system for recording full motion video signals comprising a series of sequential "still" frames, the recording/playback system comprising:

15

5

- a. a recorder/player;
- b. a central processing unit for controlling the recording/playback system;
- c. a video signal source for providing a video signal;
- d. a video signal display monitor;
- e. a video signal transmission system;
- f. a video signal switching system responsive to commands from the central

20

10

processor unit for selectively distributing the video signal to the recorder/player, the display monitor and the transmission system, wherein a full motion video signal may be distributed to the recorder/player while a selected still frame of the video signal is distributed to other components of the system.

25

30

2. The multifunction remote controlled recording/playback system of claim 1, further comprising a digital capture system for creating a still frame on the fly as the full motion video signal is generated by the video signal source, whereby a full field still frame is produced

35

3. The multifunction remote controlled recording/playback system of claim 1, further comprising means for capturing a selected group of sequential still frames on the fly as the full motion video signal is generated by the video signal source.

40

4. The multifunction remote controlled recording/playback system of claim 1, wherein the video signal transmission system is adapted for transmitting full motion video signals in a first mode as the full motion video signal is generated by the video signal source and in a second mode as a playback of the recorded full motion video signal from the recorder/player.

45

50

5. The multifunction remote controlled recording/playback system of claim 1, further

55

5

-15-

including an audio signal generator for generating an audio signal which can be recorded by the recorder/player in real time synchronization with the full motion video signal.

10

6. The multifunction remote controlled recording/playback system of claim 1, further including a data signal generator for generating a data signal which can be recorded by the recorder/player in real time synchronization with the full motion video signal.

15

7. The multifunction remote controlled recording/playback system of claim 6, wherein the data signal generator is a gps signal generator.

20

8. The multifunction remote controlled recording/playback system of claim 1, further including a marking signal generator, whereby specific, selected still frames of the recorded full motion video signal may be marked, the system being adapted to select said frames by searching for the marks, for distribution of the recorded marked frames by the video switching system.

25

9. The multifunction remote controlled recording/playback system of claim 8, wherein the marking signal generator is operative in a plurality of modes, a first mode being manually activated by an operator and a second mode being activated by a preselected data signal.

30

10. The multifunction remote controlled recording/playback system of claim 1, wherein the central processing unit is a Pentium class processor.


35


40


45

50

55

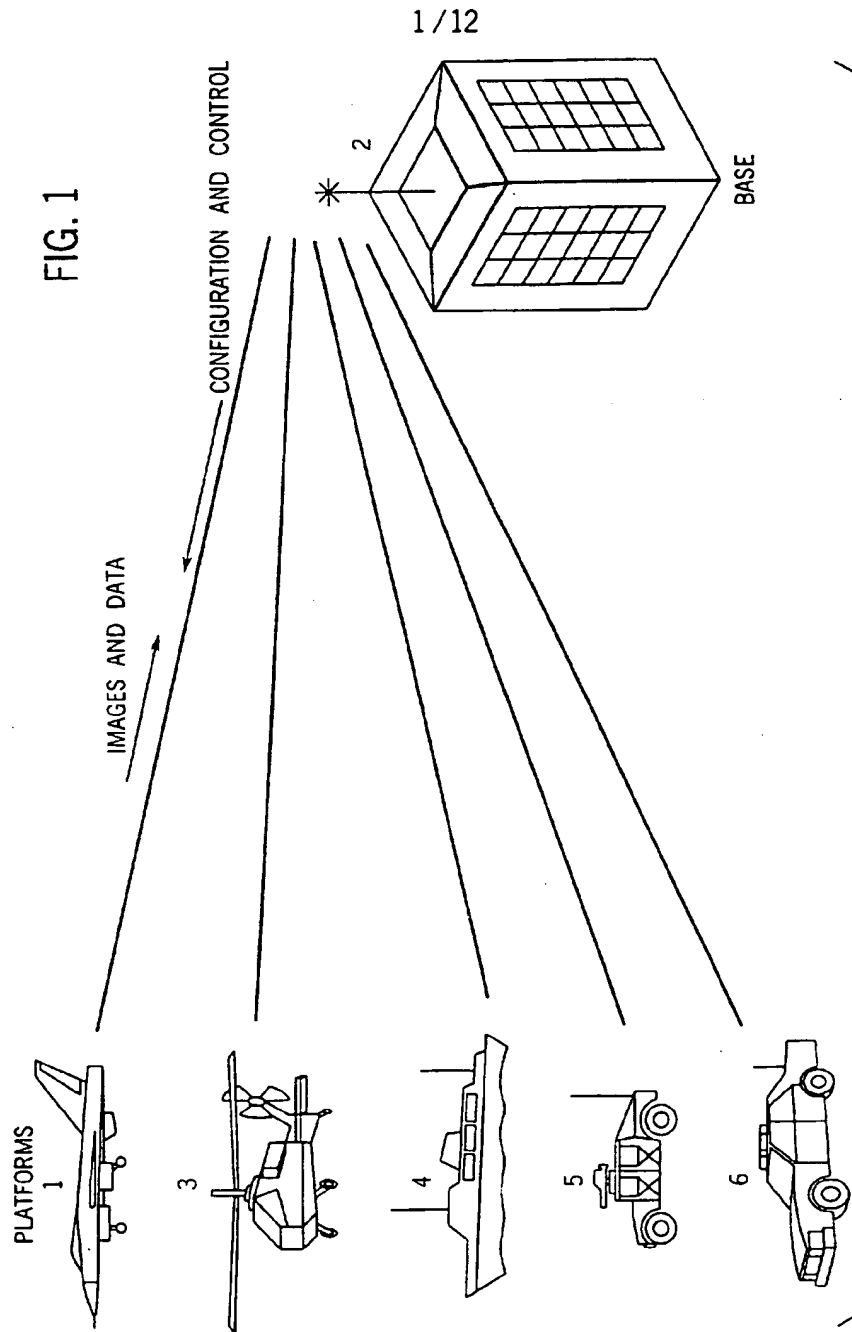

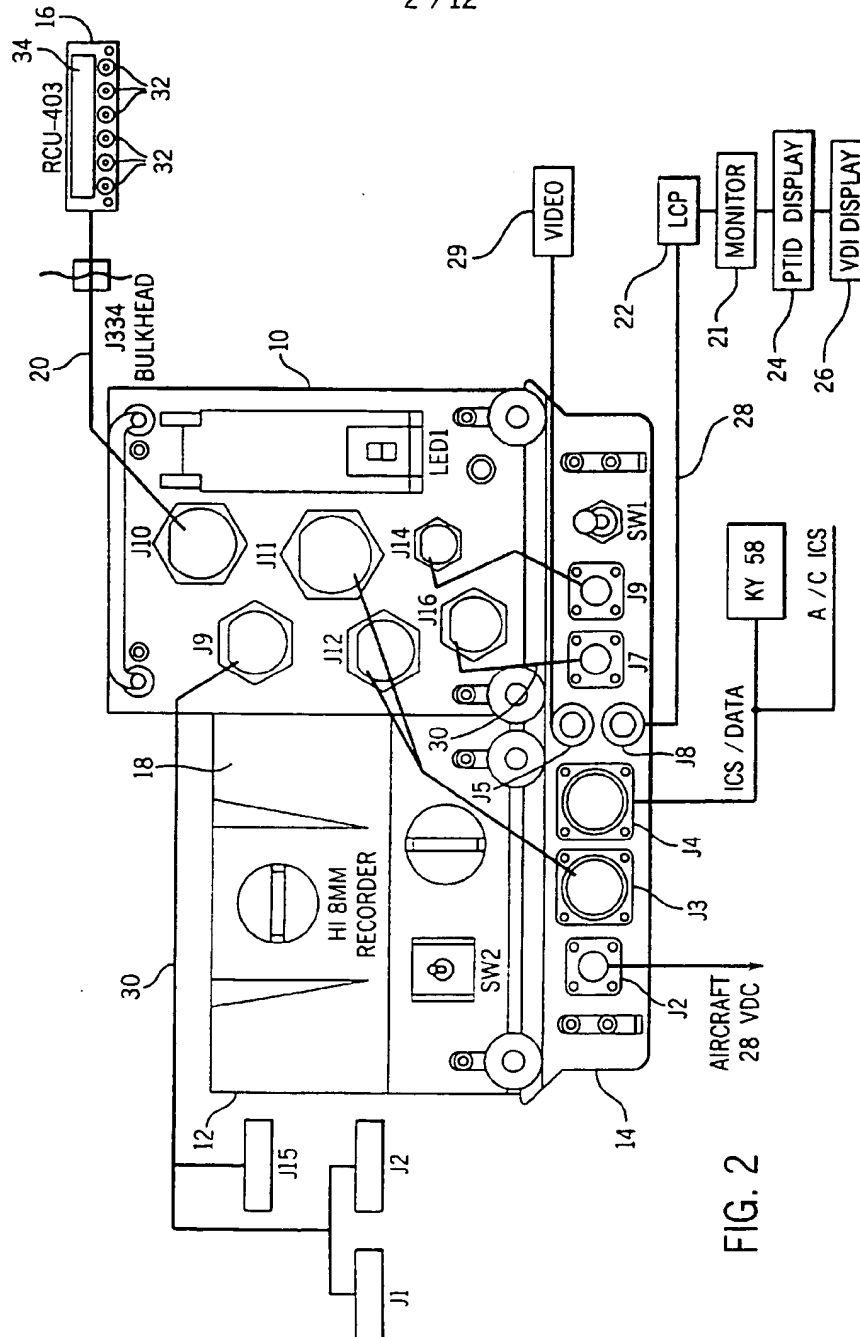

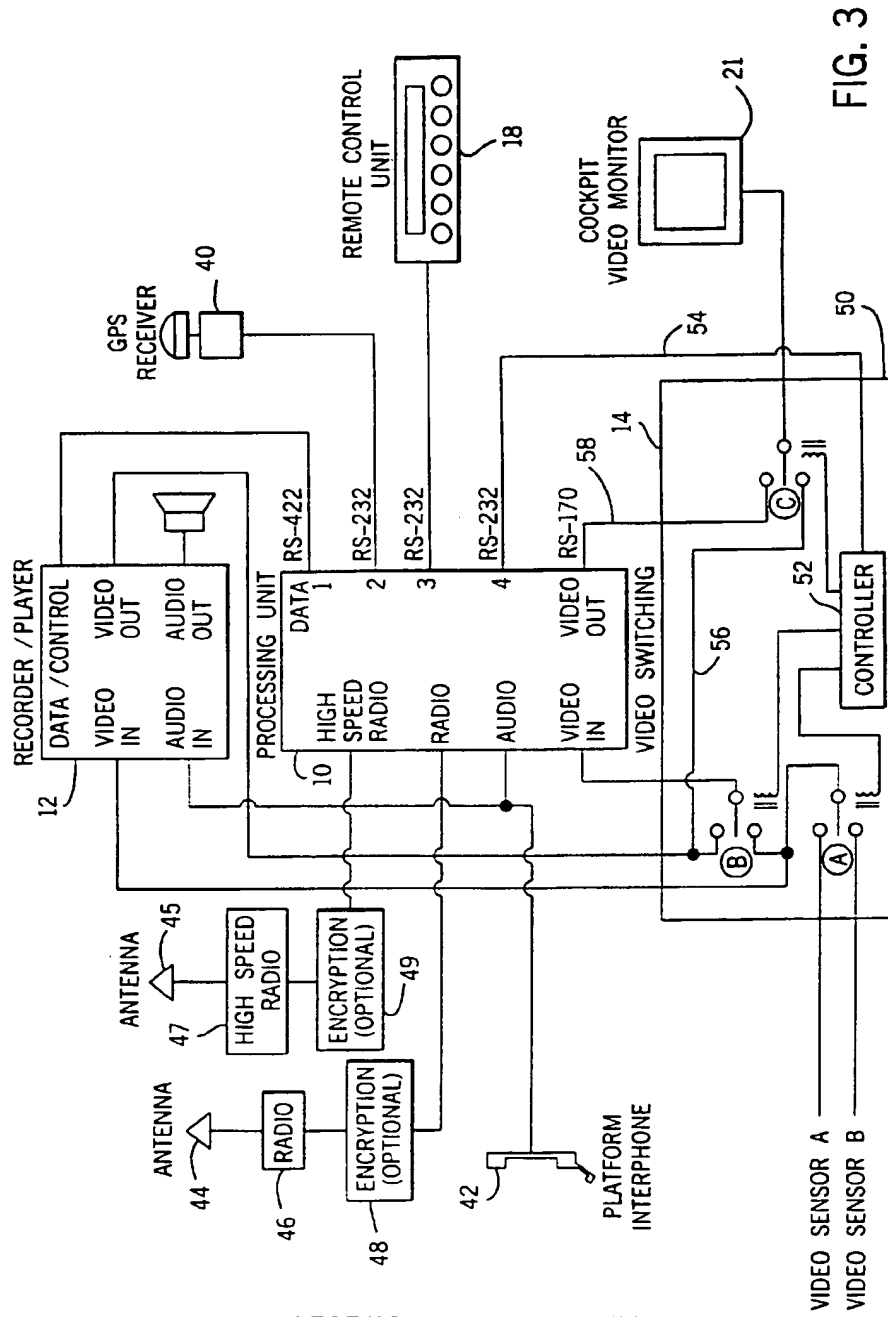

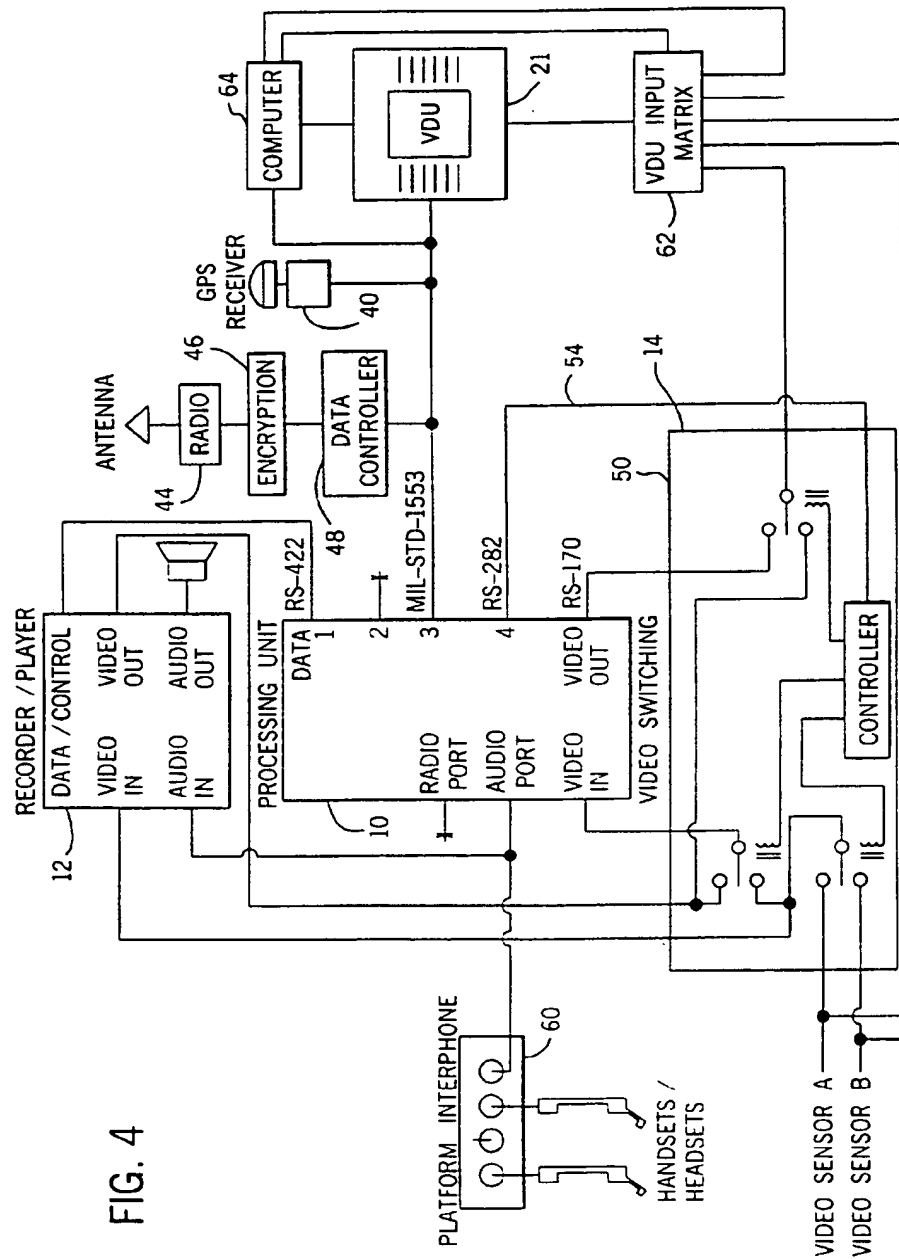


FIG. 4



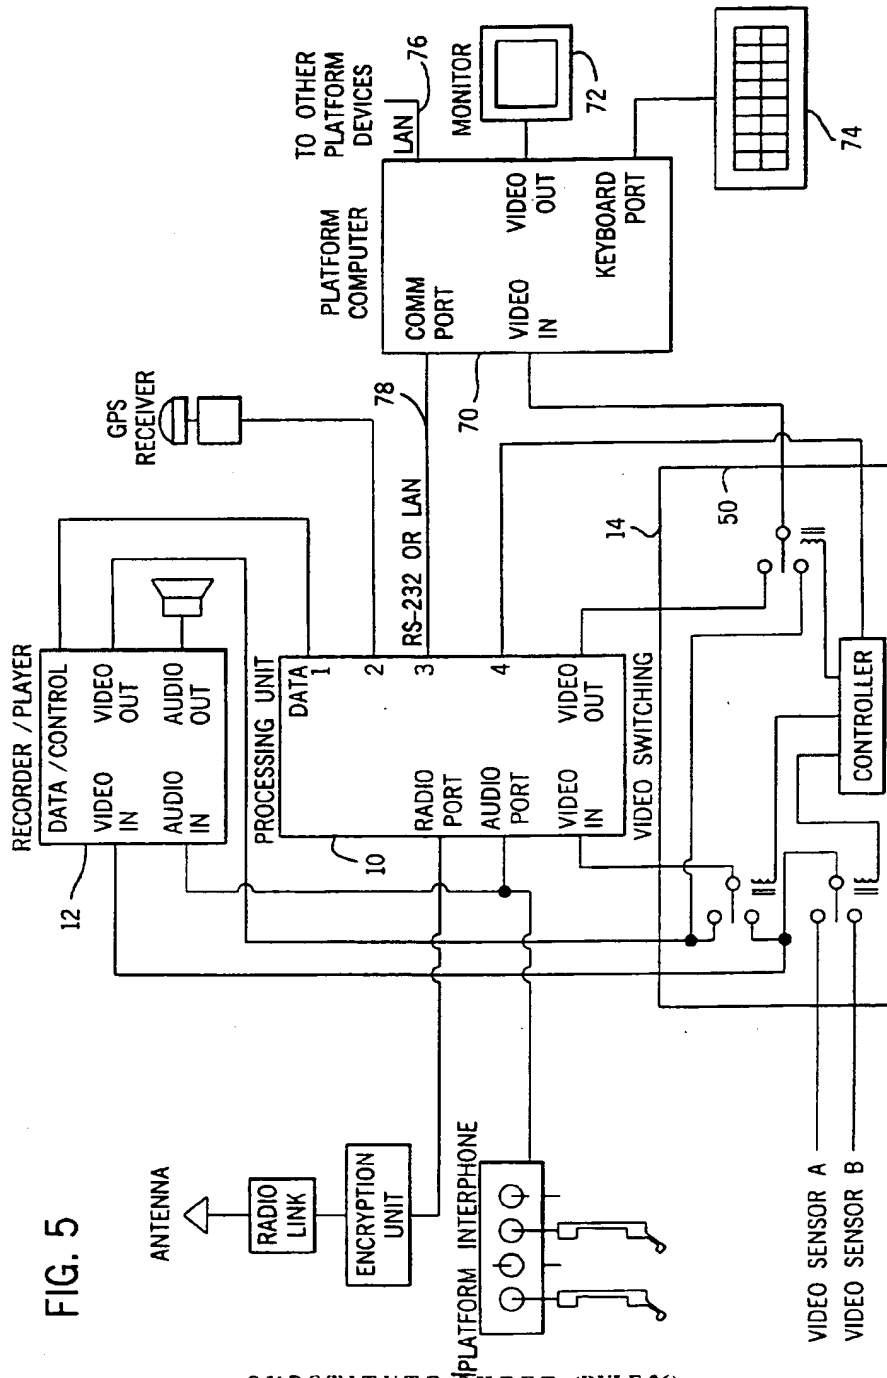



FIG. 5

6 / 12

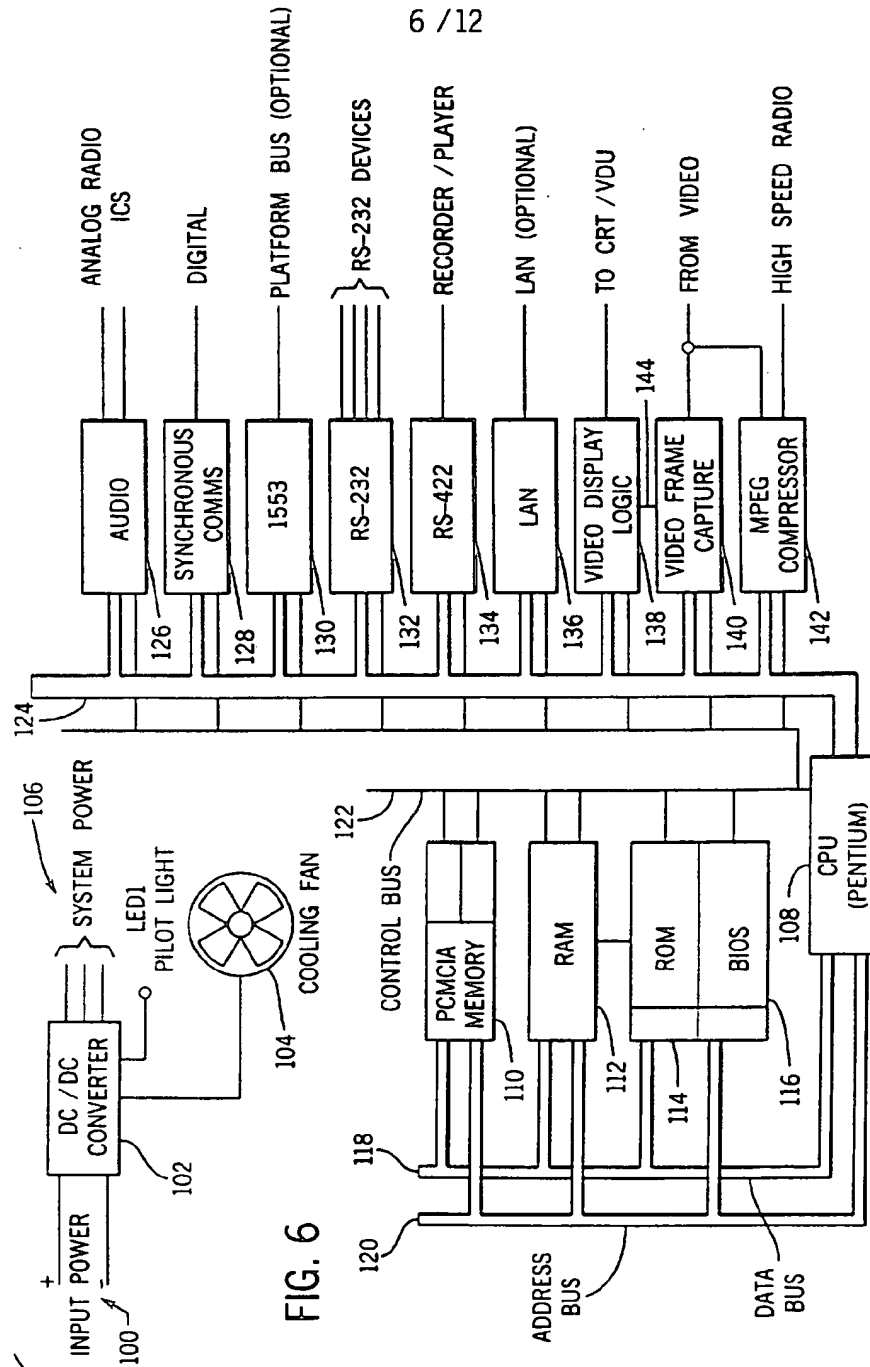

SUBSTITUTE SHEET (RULE 26)

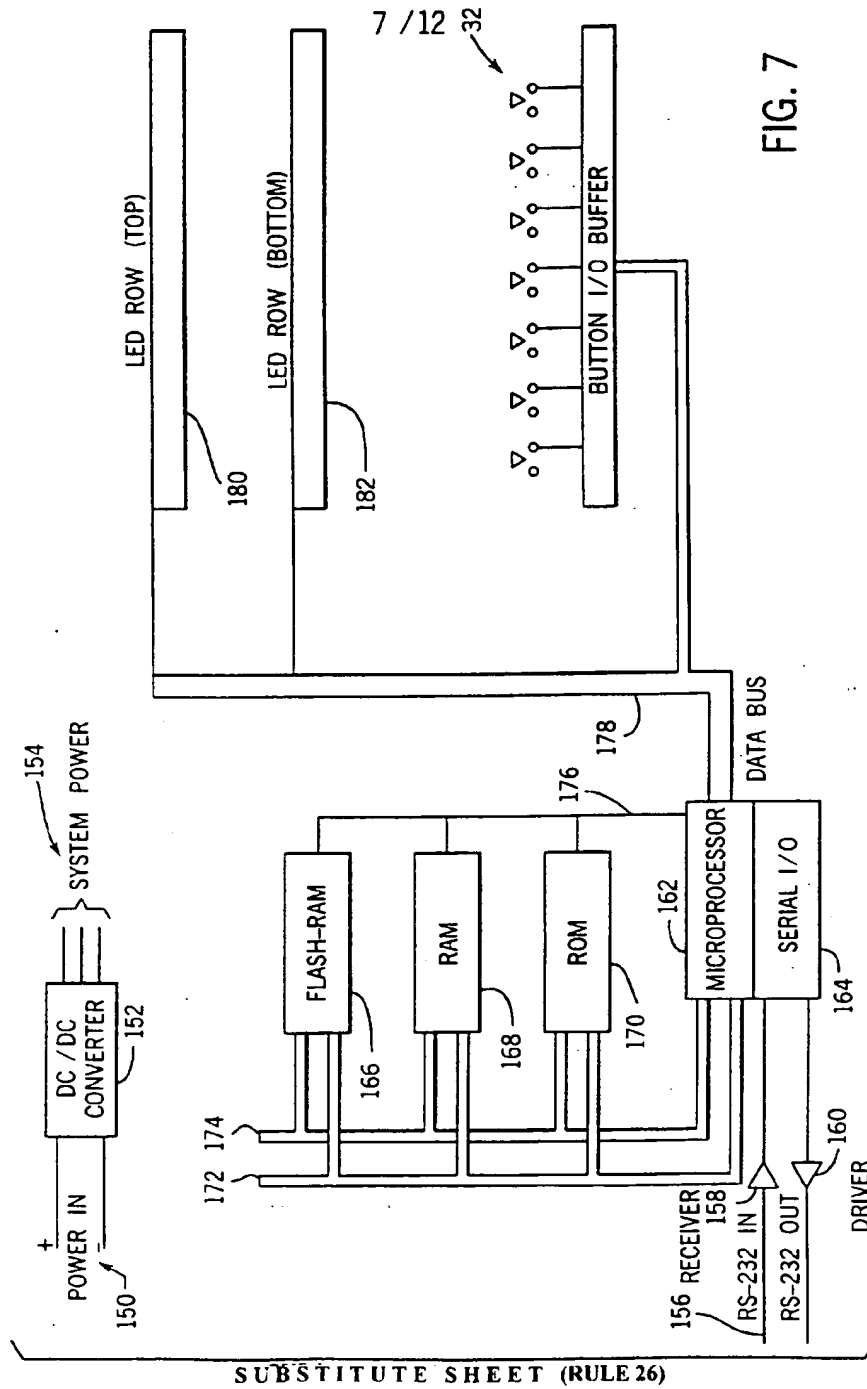

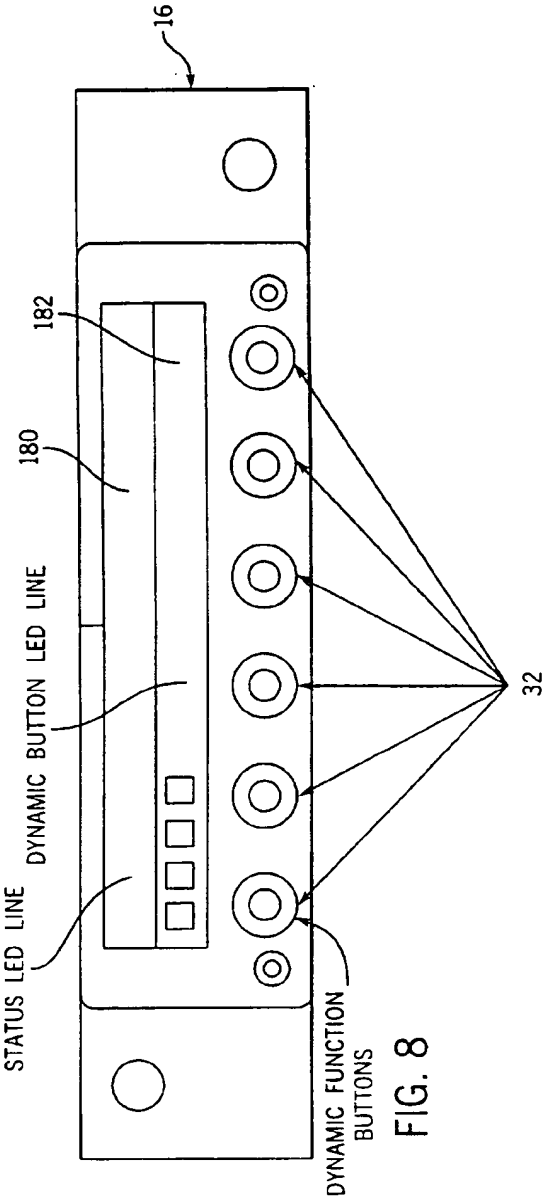

9 / 12

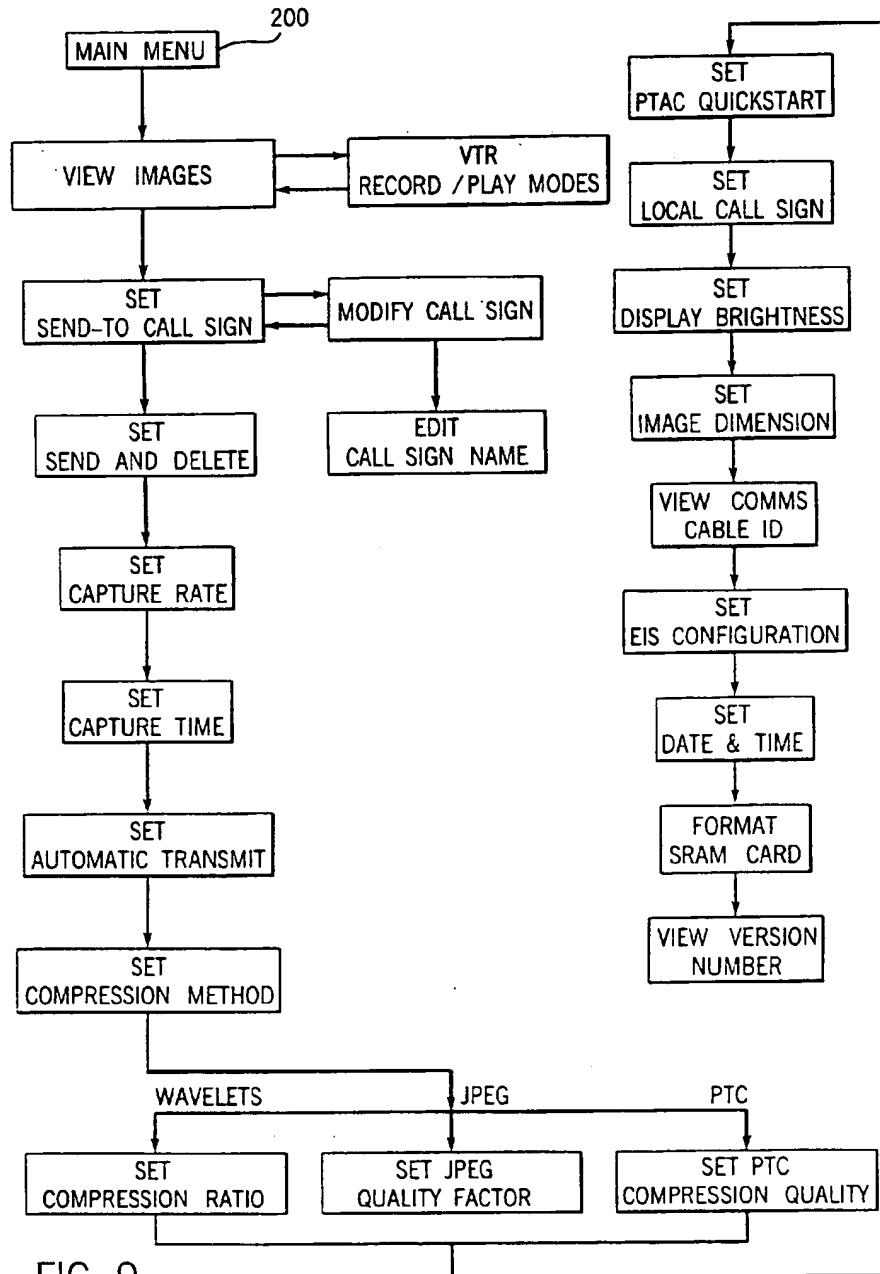


FIG. 9

SUBSTITUTE SHEET (RULE 26)

10 / 12

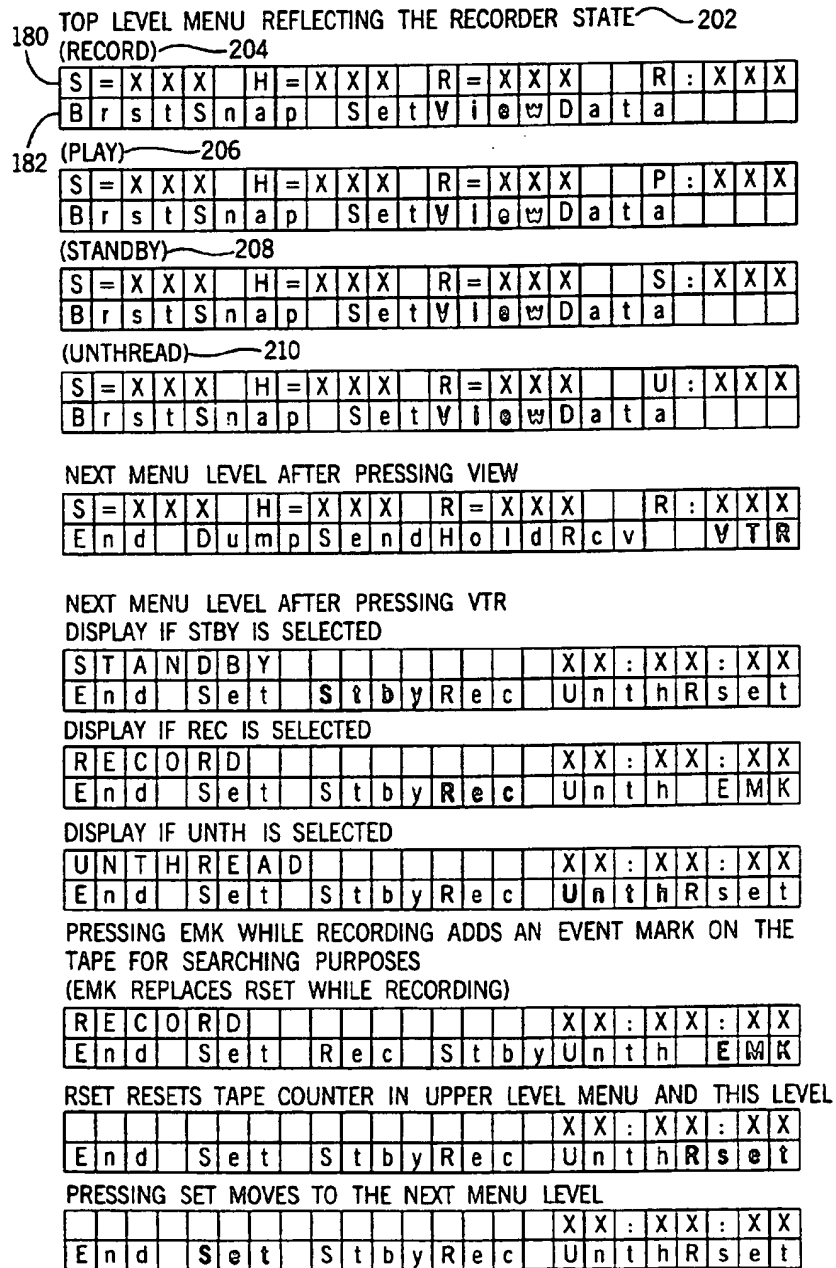


FIG. 10a

SUBSTITUTE SHEET (RULE 26)

11/12

DISPLAY IF PLAY IS SELECTED

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| P | L | A | Y | | | | | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

DISPLAY IF REW IS SELECTED

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| R | E | W | I | N | D | | | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

DISPLAY IF FF IS SELECTED

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| F | - | F | W | D | | | | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

DISPLAY IF RECORDER IS IN THE PLAY MODE AND FF IS SELECTED

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|---|---|---|---|---|---|---|---|
| S | C | A | N | | F | O | R | W | A | R | D | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | | |

DISPLAY IF RECORDER IS IN THE PLAY MODE AND REW IS SELECTED

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|---|---|---|---|---|---|---|---|
| S | C | A | N | | R | E | V | E | R | S | E | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | | |

PRESSING BACK FROM THE STIL, PLAY, REW, FF MENU RETURNS YOU TO THE STBY, REC, UNTH, RSET MENU

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| P | L | A | Y | | | | | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

OTHER POSSIBLE MENU PAGES AT THIS LEVEL

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| R | E | C | O | R | D | | | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| U | N | T | H | R | E | A | D | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

INDICATES END OF TAPE CONDITION

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| E | O | T | | | | | | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

INDICATES BEGINNING OF TAPE CONDITION

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| B | O | T | | | | | | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

INDICATES AN INTERNAL ERROR CONDITION

| | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|
| I | N | T | E | R | N | A | L | | E | R | R | O | R | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | | | R | E | W | | F | F | |

FIG. 10b

12 /12

INDICATES A COMMAND ERROR CONDITION

| | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C | O | M | M | A | N | D | E | R | R | O | R | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | R | E | W | | F | F | |

INDICATES A COMMS ERROR CONDITION BETWEEN
THE ATR AND RECORDER

| | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C | O | M | M | S | E | R | R | O | R | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | R | E | W | | F | F | |

PRESSING BACK IN ANY OF THE ABOVE RETURNS YOU TO
THE PREVIOUS PAGE

| | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C | O | M | M | S | E | R | R | O | R | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | R | E | W | | F | F | |

INDICATES CONDENSATION IN RECORDER

| | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| D | E | W | | | | | | | | | | | | | X | X | : | X | X | : | X | X |
| E | n | d | | B | a | c | k | S | t | i | l | P | l | a | y | R | E | W | | F | F | |

FIG. 10c

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/00975

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04N 5/76

US CL : 386/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
noneElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
none

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| X | US 5,596,494 A (KUO) 21 January 1997, Fig. 4 and columns 21-22. | 1-7 and 10 |
| Y | | 8-9 |
| Y | US 5,517,320 A (SCHULER) 14 May 1996, column 7. | 8-9 |
| A | US 5,604,534 A (HEDGES et al) 18 February 1997, Fig. 8. | 1-10 |
| A | US 4,910,593 A (WEIL) 20 March 1990, Fig. 7. | 1-10 |
| A | US 5,045,937 A (MYRICK) 03 September 1991, Fig. 1. | 1-10 |
| A | US 5,508,736 A (COOPER) 16 April 1996, Fig. 1. | 1-10 |

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

| | |
|---|--|
| * Special categories of cited documents: | * "I" later documents published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| * "A" document defining the general state of the art which is not considered to be of particular relevance | * "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| * "B" earlier document published on or after the international filing date | * "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | * "A" document is member of the same patent family |
| * "O" document referring to an oral disclosure, use, exhibition or other means | |
| * "P" document published prior to the international filing date but later than the priority date claimed | |

Date of the actual completion of the international search

04 MAY 1999

Date of mailing of the international search report

26 MAY 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

THAI TRAN

Telephone No. (703) 305-4725

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/00975

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

386/46, 95, 1, 4, 52, 69, 70; 348/61, 143, 144, 148, 149, 156; 701/2, 3, 4, 14, 15, 16, 17, 19, 20, 22, 23, 24, 28;
345/328; 360/13; 369/83.